




BOČNÍ POHLED

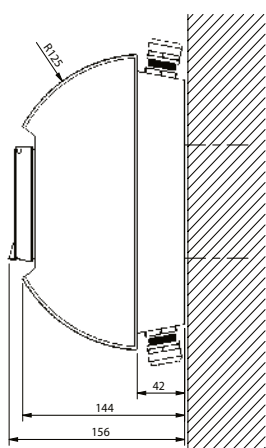

ČELNÍ POHLED

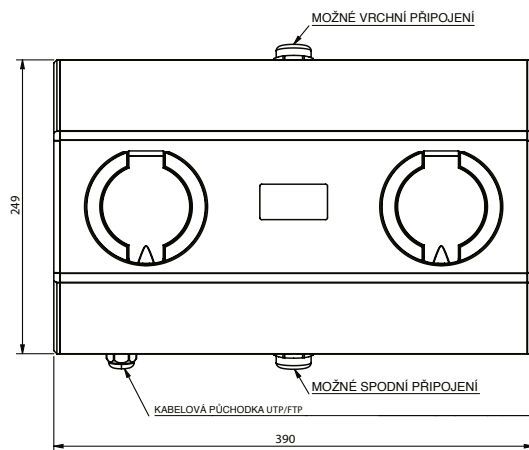

VRCHNÍ POHLED

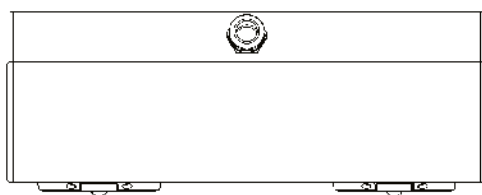

# enelion Wallbox DUO

## TECHNICAL SPECIFICATION



### WALLBOX DUO 2x 7,4 kW

Cover	resistant to weather conditions; anodized aluminium, powder coating, hardened plexiglass
Ingress protection	IP 54
Impact protection	IK10
Residual current protection*	RCD B / Enelion RCM B + RCD A
Charging connector	AC 2x socket Type 2; EN 62196-1
Energy meter	built-in
MID Energy meter*	2x single-phase
Communication module Bridge OCPP 1.6*	offline / Wi-Fi, Ethernet / LTE (GSM)
User interface	LED Light bar; OLED Screen
User authorization*	RFID + 2 cards (MIFARE / ISO14443) / FreeCharge
Charging points parameters	3-phase electric power
Line-to-line voltage	400V
The frequency of the charging point	50 Hz
Charging current/power	2x 3x32A / 2x 7,4kW
Charging voltage	230V AC
Max. charging current	2 x 32A
Branding*	according to the customer's needs
Operating temperature	-25 °C / +55 °C
Storage temperature	-40 °C / + 80 °C
Max. above sea level	2 000 m
Height (mm)	249
Width (mm)	390
Depth (mm)	156
Weight	3,0-3,5 kg

\* Optional equipment